

Fixed Industrial Scanner

VER. 20260319

ZX-1060 **NEW**

Fixed Industrial Scanner (PRELIMINARY)



The ZX-1060 features liquid lens autofocus technology, delivering fast and precise focusing with just a few sampled images. This allows sharp and reliable decoding of difficult code types such as hollow dot matrix, hole array, curved DPM, and pin collision DPM codes.

Its compact size of 47 x 25 x 43 mm fits easily into confined spaces. The integrated cable merges power, Ethernet, serial port, and IO trigger lines into one connection, simplifying installation and reducing setup complexity.

With a flexible working distance from 40 mm to 300 mm, the ZX-1060 covers a broad range of industrial scanning needs. Its 1288 x 1088 global shutter CMOS sensor captures distortion-free images with a wide field of view, ensuring codes are read clearly even on uneven or curved surfaces.

- Liquid lens autofocus with fast, precise focusing
- 40–300 mm working distance
- Compact size and wide field of view
- IP65 protection against dust and water
- Multi-protocol support including Modbus, Profinet, and Ethernet/IP

1. One-key adjustment for efficient production
2. Supports DPM barcode reading



OPERATIONAL

Illumination Element	Polarized White Light
Optical System	1288 x 1088 CMOS
FOV	192 x 120 mm (Typical example at 300 mm)
Depth of Field	40mm ~ 300 mm (Auto Focus)
Indicator	2 green light
System Interface	RS232, Ethernet (TCP Server, TCP Client, ModBus TCP, ModBus RTU, Profinet, Ethernet/IP, MEMSEC/SLMP, Fins, Serial)

PHYSICAL

Dimension	47 x 25 x 43 mm
Weight	about 100g

POWER

Input Voltage	24 VDC
Power Consumption	5W

REGULATORY


EMC	CE, FCC, VCCI, BSMI, UKCA
-----	---------------------------

ENVIRONMENTAL

Operating Temperature	0°C ~ 45 °C
Storage Temperature	-20°C ~ 70°C
Humidity	5% ~ 95% RH (non-condensation)
Environmental Sealing	IP65

DECODING CAPABILITY

1D Barcode	Code39, Code93, Code128, EAN-8, EAN-13, Interleaved 2 of 5, UPC, Pharmacode
2D Barcode	QR code, DataMatrix, MicroQR, PDF417

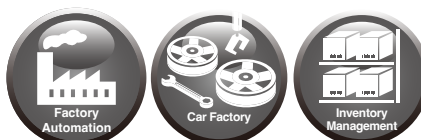

Web Site / www.zebex.com
E-mail / mail@zebex.com

Product availability and specifications depend on territory market strategy; all are subjects to change without prior notice.

ZEBEX is the trademark of ZEBEX INDUSTRIES INC, all rights reserved.